



Our standard
means more

VACUUM PACKER TABLE TOP VP-430.10


GENERAL CHARACTERISTICS



- ✓ Totally manufactured in AISI 304 stainless steel .
- ✓ Transparent lid.
- ✓ Double sealing.
- ✓ Progressive atmosphere (Soft Air).
- ✓ Digital control panel.
- ✓ Pneumatic sealing.
- ✓ Easy disassembly of sealing bars.
- ✓ Equipped with polyethylene for faster packaging and easier bag placement.
- ✓ Easy maintenance.
- ✓ 10 m³/h BUSCH pump.

OPTIONS


- ✓ Gas flushing entrance.
- ✓ Controlled by sensor.
- ✓ Cut of bag.

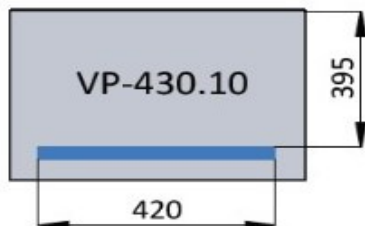

ACCESSORIES

- ✓ Inclined plate for packaging products with liquids or sauces.
- ✓ Vacuum connector in external buckets.

TECHNICAL INFORMATION

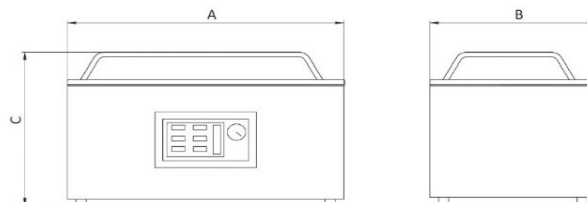


Model	Machine Dimensions (mm)			Pump Capacity	Pump power HP/Kw	Chamber dimensions (mm)	Packaging dimensions (mm)	Net/gross weight (Kg)
	A	B	C					
VP-430.10	490	580	470	10 m ³ /h	0.5/0.37	430x450x180	770x730x700	60/68






Our standard
means more

TYPE OF SEALING




**DOUBLE
SEALING**




**SIMPLE
SEALING + CUT**

CONTROL PANELS

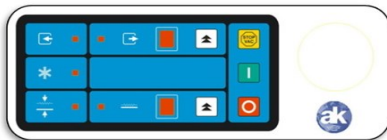


Control Panel by time and without gas

- Digital control panel.
- Vacuum controlled by time.
- Sealing time regulation.
- Soft-air.
- VAC-STOP push button, finish the vacuum & continue the process.
- Monitoring step by step of the cycle through leds.
- Vacuum gauge.

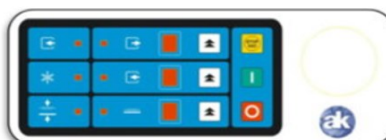

Control Panel by time and gas

- Digital control panel.
- Vacuum control by time.
- Gas flushing entrance control by time.
- Sealing time regulation.
- Soft-air.
- VAC-STOP push button, finish the vacuum & continue the process.
- Monitoring step by step the cycle through leds.
- Vacuum gauge.

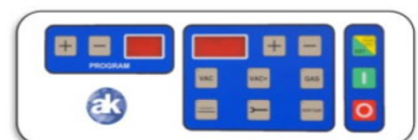

Control Panel by sensor

- Digital control panel.
- Vacuum control by sensor.
- Gas flushing entrance control by sensor.
- Sealing time regulation.
- Soft-air.
- VAC-STOP push button, finish the vacuum & continue the process.
- VAC+ push button, additional vacuum time
- Maintenance push button control.
- 99 memory positions.
- Monitoring step by step of the cycle through led.

