



Our standard
means more

VACUUM PACKER STANDING VP-600




GENERAL CHARACTERISTICS

- ✓ Totally manufactured in AISI 304 stainless steel.
- ✓ Transparent lid.
- ✓ Double sealing.
- ✓ Progressive atmosphere (Soft Air).
- ✓ Digital control panel.
- ✓ Pneumatic sealing (without wires).
- ✓ Easy disassembly of sealing bars.
- ✓ Equipped with polyethylene for faster packaging and easier bag placement.
- ✓ Easy maintenance.
- ✓ 20 m³/h BUSCH pump.
- ✓ Voltage : 230 V/ 1ph/ 50 Hz.

OPTIONS

- ✓ BUSCH pump of 40 m³/h. three-phase 400V / 3ph / 50Hz.
- ✓ Gas flushing entrance.
- ✓ Controlled by sensor.
- ✓ Cut of bag

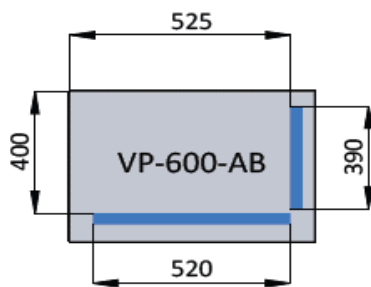


ACCESSORIES

- ✓ Inclined plate for packaging products with liquids or sauces.
- ✓ Vacuum connector in external containers.

TECHNICAL INFORMATION

Model	Capacity	Pump power HP/Kw
VP-600	20 m ³ /h	1.02/0.75
VP-600	40 m ³ /h	2.04/1.5

DIMENSIONS IN MM

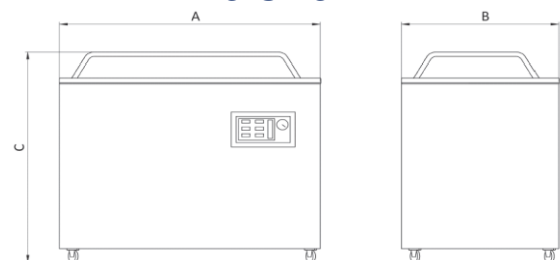


Model	Machine dimensions (mm)			Chamber dimensions (mm)	Packaging dimensions (mm)	Net/gross weight (Kg)
	A	B	C			
VP-600	637	580	1.022	580x450x180	840x760x1.210	140/185






Our standard
means more

TYPE OF SEALING




**DOUBLE
SEALING**



**SIMPLE
SEALING + CUT**

CONTROL PANELS

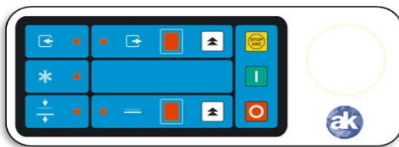


Control Panel by time and without gas

- Digital control panel.
- Vacuum controlled by time.
- Sealing time regulation.
- Soft-air.
- VAC-STOP push button, finish the vacuum & continue the process.
- Monitoring step by step of the cycle through leds.
- Vacuum gauge.



Control Panel by time and gas

- Digital control panel.
- Vacuum control by time.
- Gas flushing entrance control by time.
- Sealing time regulation.
- Soft-air.
- VAC-STOP push button, finish the vacuum & continue the process.
- Monitoring step by step the cycle through leds.
- Vacuum gauge.

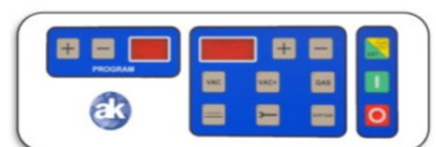

Control Panel by sensor

- Digital control panel.
- Vacuum control by sensor.
- Gas flushing entrance control by sensor.
- Sealing time regulation.
- Soft-air.
- VAC-STOP push button, finish the vacuum & continue the process.
- VAC+ push button, additional vacuum time
- Maintenance push button control.
- 99 memory positions.
- Monitoring step by step of the cycle through led.

