


INDUSTRIAL VACUUM PACKER VP-700 TB 100

GENERAL CHARACTERISTICS



- ✓ Totally manufactured in AISI 304 stainless steel.
- ✓ Lid cover of AISI 304 stainless steel.
- ✓ Manual lid opening system.
- ✓ Double sealing.
- ✓ Progressive atmosphere (Soft Air).
- ✓ Gas flushing entrance.
- ✓ Vacuum and gas control by sensor.
- ✓ Digital control panel with 99 memory programs.
- ✓ Sealing bars with pneumatic cylinders.
- ✓ Equipped with polyethylene for faster packaging and easier bag placement.
- ✓ Easy maintenance.
- ✓ Busch pump of 100 m³/h.
- ✓ Voltage : 400V/ 3ph/ 50 Hz.

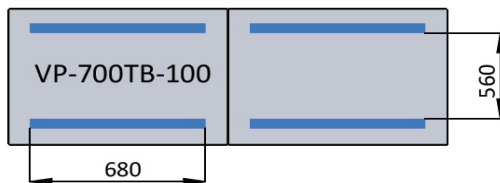


OPTIONS

- ✓ Cut of bag.
- ✓ Independent sealing and cutting control.
- ✓ Voltage : 220V/ 3ph/ 60 Hz.

TECHNICAL INFORMATION


Model	Capacity	Pump power HP/Kw
VP-700 TB 100	100 m ³ /h	3.67/2.7

DIMENSIONS IN MM

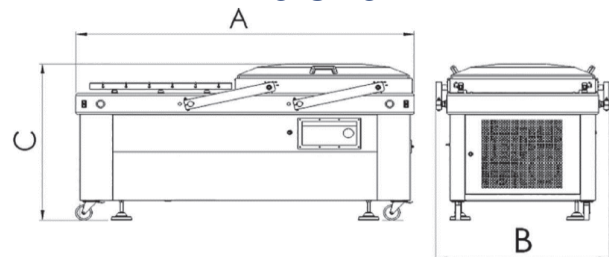


Model	Machine dimensions (mm)			Chamber dimensions (mm)	Packaging dimensions (mm)	Net/gross weight (Kg)
	A	B	C			
VP-700 TB 100	1.590	710	1.000	836x680x200	1760x900x1200	421/441

TYPE OF SEALING

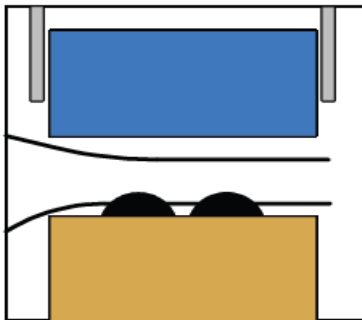


**DOUBLE
SEALING**

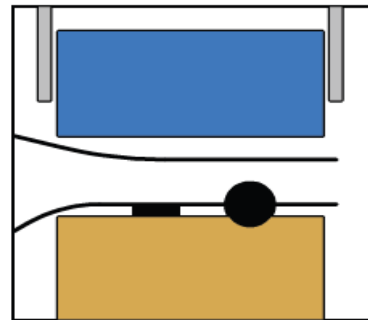

**SIMPLE
SEALING + CUT**

CONTROL PANEL

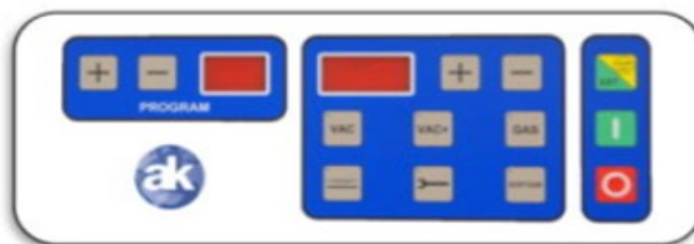

Control Panel by sensor

- Digital control panel.
- Vacuum control by sensor.
- Gas flushing entrance control by sensor.
- Sealing time regulation.
- Soft-air.
- VAC-STOP push button, finish the vacuum & continue the process.
- VAC+ push button, additional vacuum time
- Maintenance push button control.
- 99 memory positions.
- Monitoring step by step of the cycle through led.