

SEMI-AUTOMATIC TRAY SEALER TS-200 GF

GENERAL CHARACTERISTICS




- ✓ Totally manufactured in AISI 304 stainless steel.
- ✓ Die set in anodized aluminum.
- ✓ Semi-automatic tray sealer.
- ✓ Equiped with gas flushing.
- ✓ Automatic sealing system.
- ✓ Automatic film power supply.
- ✓ Acoustic and luminous signal from the end of the cycle.
- ✓ Cut of the film by the back side.
- ✓ Digital panel with sealing temperature regulator (0°-230° C).
- ✓ Compact and robust model.
- ✓ Easy mold change, molds are interchangeable in a few seconds.
- ✓ Fast heating of the selected temperature.
- ✓ It allows to work with different types of tray materials, PP, PET, ALUMINIUM...
- ✓ Maximum sealing surface: 280×192 mm.
- ✓ Film roll width: 220 mm.
- ✓ Power: 900 W.
- ✓ Voltage: 220 V/ 1ph/ 50 Hz.

STANDARD DIE SETS

- ✓ Multi-mold for 3 different sizes: 260×192 mm; 224×192 mm; 137×192 mm
- ✓ 1/8 GN (168×130 mm)(2 trays)
- ✓ 1/4 GN (260×160 mm)(1 tray)
- ✓ Any type and shape of mold can be manufactured according to the customer trays.

TECHNICAL INFORMATION

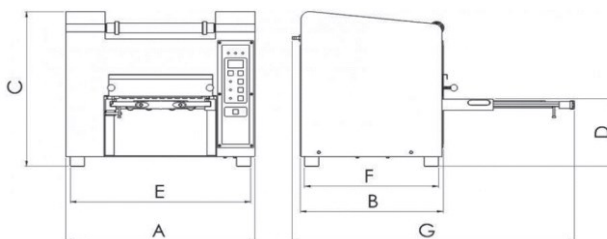

Model	Machine dimension (mm)							Packaging dimensions (mm)	Net/gross weight (Kg)	Film roll width (mm)
	A	B	C	D	E	F	G			
TS-200 GF	525	395	480	350	465	340	770	770x730x700	49/54	220