

SEMI-AUTOMATIC TRAY SEALER TS-300 GF

GENERAL CHARACTERISTICS



- ✓ Totally manufactured in AISI 304 stainless steel.
- ✓ Die set in anodized aluminum.
- ✓ Semi-automatic tray sealer.
- ✓ Automatic sealing system.
- ✓ Equiped with gas flushing.
- ✓ Automatic film power supply.
- ✓ Acoustic and luminous signal from the end of the cycle.
- ✓ Perimetral cutting with the shape of the tray.
- ✓ Digital panel with sealing temperature regulator (0°-230° C).
- ✓ Compact and robust model.
- ✓ Easy mold change, molds are interchangeable in a few seconds.
- ✓ Fast heating of the selected temperature.
- ✓ It allows to work with different types of tray materials, PP, PET, ALUMINIUM...
- ✓ Maximum sealing surface: 320×260 mm.
- ✓ Film roll width: 430 mm.
- ✓ Power: 1,500 W.
- ✓ Voltage: 220V/1ph/50Hz.


STANDARD DIE SETS

- ✓ 1/2 GN (320×260 mm) (1 tray)
- ✓ 1/4 GN (260×160 mm) (2 trays)
- ✓ 1/8 GN (168×130 mm) (4 trays)
- ✓ Any type and shape of die set can be manufactured according to the customer trays.

OPTIONS

- ✓ 6L silent compressor.

TECHNICAL INFORMATION

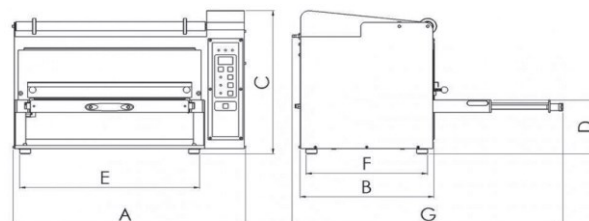

Model	Machine dimension (mm)							Packaging dimensions (mm)	Net/gross weight (Kg)	Film roll width (mm)
	A	B	C	D	E	F	G			
TS-300 GF	671	385	480	375	490	325	770	770x730x700	65/75	430