

AUTOMATIC TRAY SEALER TS-550

GENERAL CHARACTERISTICS



- ✓ Totally manufactured in AISI 304 stainless steel.
- ✓ Die set in anodized aluminum.
- ✓ Automatic tray sealer.
- ✓ Ergonomic and robust model.
- ✓ Perfect for transporting food without loss of liquids or sauces.
- ✓ Easy change of molds are interchangeable in a few seconds.
- ✓ Fast heating at the selected temperature.
- ✓ It allows to work with different types of tray materials,
- ✓ PP, PET, ALUMINIUM...
- ✓ Busch three phase pump 21 m³/h.
- ✓ Easy cleaning and maintenance.
- ✓ Digital control panel.
- ✓ Vacuum control by sensor.
- ✓ Gas flushing entrance control by sensor.
- ✓ Sealing temperature and time regulation.
- ✓ VAC-STOP push button, finish the vacuum & continue the process.
- ✓ Maintenance push button control.
- ✓ Digital panel equipped with 99 memory programs.
- ✓ Monitoring Step-by-step of the cycle through LEDs.
- ✓ Maximum film roll width: 400 mm.
- ✓ Power: 1500 W
- ✓ Voltage: 400V/3ph/ 50 Hz.

STANDARD MOLDS WITH PERIMETER FIL CUTTING

- ✓ 1/2 GN (320×260 mm) (1 tray)
- ✓ 1/4 GN (260×160 mm) (2 trays)
- ✓ 1/8 GN (168×130 mm) (4 trays)
- ✓ Any form or form of die set could be manufactured accord to the customer's trays


STANDARD MOLDS WITH FILM CUT AT THE BACK, NON-PERIMETER

- ✓ 1/2 GN (320×260 mm) (1 tray)
- ✓ 1/4 GN (260×160 mm) (2 trays)
- ✓ 1/8 GN (168×130 mm) (4 trays)
- ✓ Any form or form of die set could be manufactured accord to the customer's trays



Our standard
means more

TECHNICAL INFORMATION

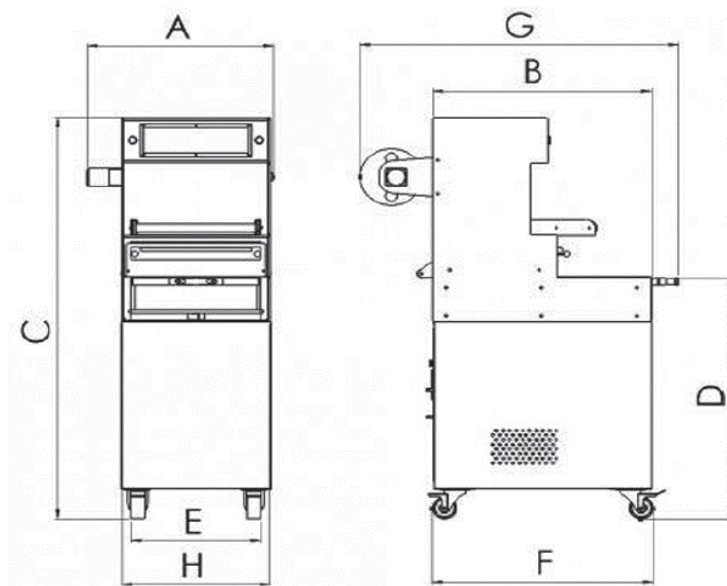

Model	Machine dimension (mm)							Packaging dimensions (mm)	Net/gross weight (Kg)	Film roll width (mm)
	A	B	C	D	E	F	G			
TS-550	495	730	1.485	890	435	830	500	650x1050x1510	142/150	400

