



Our standard
means more

VACUUM PACKER STANDING VP-1000


GENERAL CHARACTERISTICS



- ✓ Totally manufactured in AISI 304 stainless steel.
- ✓ Transparent lid.
- ✓ Double sealing.
- ✓ Progressive atmosphere (Soft Air).
- ✓ Digital control panel.
- ✓ Easy disassembly of sealing bars.
- ✓ Equipped with polyethylene for faster packaging and easier bag placement.
- ✓ Easy maintenance.
- ✓ 100 m³/h BUSCH pump.
- ✓ Voltage : 400 V/ 3ph/ 50 HZ.

OPTIONS

- ✓ Gas flushing entrance.
- ✓ Controlled by sensor.
- ✓ Cut of bag.

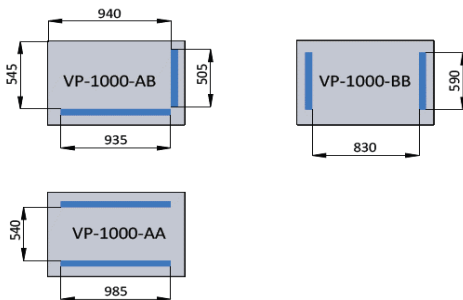


ACCESSORIES

- ✓ Inclined plate for packaging products with liquids or sauces.
- ✓ Vacuum connector in external buckets.

TECHNICAL INFORMATION

Model	Capacity	Pump power HP/Kw
VP-1000	100 m ³ /h	3.67/2.7


DIMENSIONS IN MM

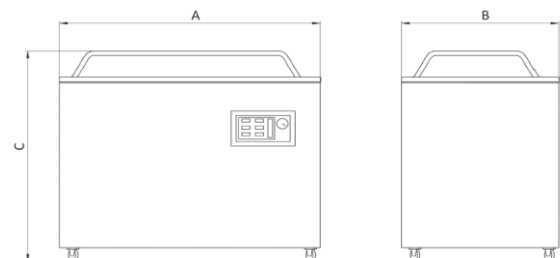


Model	Machine dimensions (mm)			Chamber dimensions (mm)	Packaging dimensions (mm)	Net/gross weight (Kg)
	A	B	C			
VP-1000 AB, AA, BB, ABA & BAB	1.080	700	1.040	1.000x600x200	1.020x830x1.220	240/295
VP-1000 HIGH AB	1.080	700	1.140	1.000x600x300	1.020x830x1.220	245/300



TYPE OF SEALING



**DOUBLE
SEALING**



**SIMPLE
SEALING + CUT**

CONTROL PANEL




Control Panel by time and without gas

- Digital control panel.
- Vacuum control by time.
- sealing time regulation.
- Progressive atmosphere (Soft-Air).
- VAC-STOP button, finish the vacuum, but continue the process.
- Step-by-Step monitoring of the cycle through LEDs.
- Vacuum gauge.



Control Panel by time and with gas

- Digital control panel.
- Vacuum control by time.
- Gas flushing entrance control by time.
- sealing time regulation.
- Progressive atmosphere (Soft-Air).
- VAC-STOP button, finish the vacuum, but continue the process.
- Step-by-Step monitoring of the cycle through LEDs.
- Vacuum gauge.

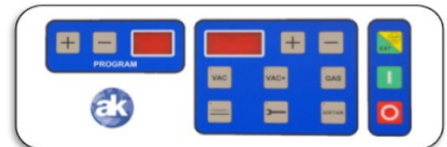

Control Panel by sensor

- Digital control panel.
- Vacuum control by sensor.
- Gas flushing entrance control by sensor.
- Sealing time regulation.
- Progressive atmosphere (Soft-Air).
- VAC-STOP button, finish the vacuum, but continue the process.
- VAC+ button, additional vacuum time.
- Maintenance button control
- 99 memory positions.
- Step-by-Step monitoring of the cycle through LEDs.